



TECHNICAL SPECIFICATIONS

R1075-CNPN-300 DOOR PULL


BARREL STITCH OUT RECESS LEATHER 300MM CENTRE IN CHESTNUT AND POLISHED NICKEL



CHESTNUT (CN)



POLISHED NICKEL (PN)

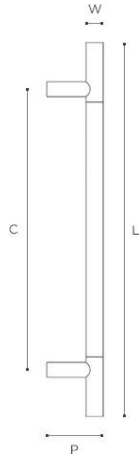

400_{max} length (l) | 65_{max} projection (p) | 300_{max} centre to centre (c) | 25_{max} max grip width (w)

| | | | |
|---|-------------------|-------------------|-------------------|
| C | 200mm / 7 7/8" | 300mm / 11 13/16" | 400mm / 15 3/4" |
| L | 300mm / 11 13/16" | 400mm / 15 3/4" | 500mm / 19 11/16" |
| P | 65mm / 2 9/16" | 65mm / 2 9/16" | 65mm / 2 9/16" |
| W | 25mm / 31/32" | 25mm / 31/32" | 25mm / 31/32" |

Dimensional Tolerance +/- 1.5mm



Image represents 300 c/c option

NOT TO SCALE

OTHER FINISH OPTIONS

Leather Finishes



CHESTNUT CN | CHOCOLATE CT | BLACK BL | TAN TA | SLATE GREY GC | WHITE (SPECIAL ORDER) BW



BRIGHT CHROME BC | SATIN NICKEL SN | POLISHED NICKEL PN | POLISHED BRASS PU | FINE ANTIQUE BRASS FA | VINTAGE NICKEL VN | VINTAGE PATINA VP

FIXING OPTIONS

Single Bolt Fix - M10 x 50mm long machine bolt (45mm max door thickness)

Single Face Fit - Self tapping inserts with face fix spindles (30mm min door thickness)

Back-to-Back Pair - M10 back-to-back spindles (60mm max door thickness; please state if glass door)

Please contact Sales for alternative fixing kits